



# DALLAI

**STRINGENT PERFORMANCE TESTING**

**PREFERRED SUPPLIER WORLDWIDE**

**ENGINEERS SPEC TO DALLAI**

**QUALITY ASSURED**



**B-TYPE**  
**A-TYPE**  
**F-TYPE**

## 2" to 18"

50mm to 450mm

Access Australia's Largest Range

Phone +617 3399 1288

[info@ibinternational.com.au](mailto:info@ibinternational.com.au)

[www.ibinternational.com.au](http://www.ibinternational.com.au)



**QUICK CONNECT**  
**COUPLINGS**  
**Dewatering and Irrigation**

## B-TYPE COUPLINGS

Diameter	Working Pressure	Maximum Deviation of Coupling
50mm	20 bars	30°
76mm	20 bars	30°
89mm	20 bars	30°
108mm	15 bars	30°
133mm	12 bars	20°
159mm	12 bars	20°
194mm	12 bars	20°
250mm	12 bars	20°
300mm	12 bars	16°
400mm	6 bars	16°
450mm	6 bars	18°

\* INTERCHANGEABLE WITH BAUER TYPE

Australia's largest range of suction and discharge quick connect couplings.

Quick ball type couplings available in galvanised steel, ungalvanised weld-on, polycoat, polycrimp and stainless steel.




B-TYPE

## F-TYPE COUPLINGS

3-HOOK FEMALE TYPE

Diameter	Working Pressure	Maximum Deviation of Coupling
50mm	18 bars	26°
60mm	18 bars	28°
80mm	18 bars	30°
100mm	15 bars	28°
120mm	15 bars	28°
150mm	15 bars	22°

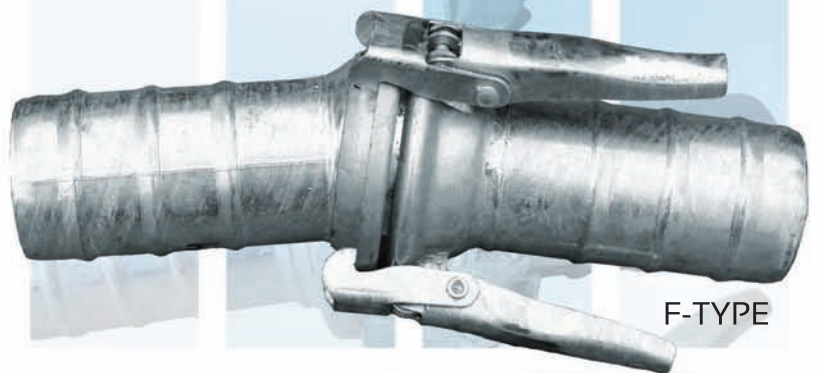


F-TYPE

## A-TYPE COUPLINGS

3-HOOK FEMALE TYPE

Diameter	Working Pressure	Maximum Deviation of Coupling
100mm	20 bars	
120mm	20 bars	
150mm	15 bars	28°
200mm	10 bars	24°
250mm	6 bars	16°
300mm	5 bars	16°
350mm		
400mm		

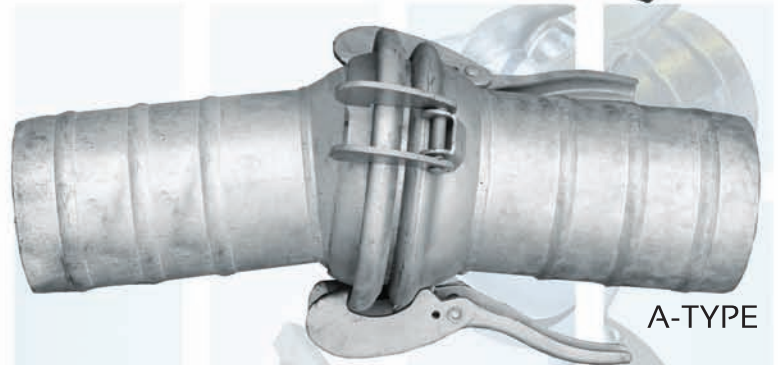

A-TYPE



PO Box 5481 Manly QLD 4179

Phone: +617 3399 1288

Email: info@ibinternational.com.au

Web: www.ibinternational.com.au

SUPPLIED BY

